


# MOTO X1

## Your MOTO X1 Introduction

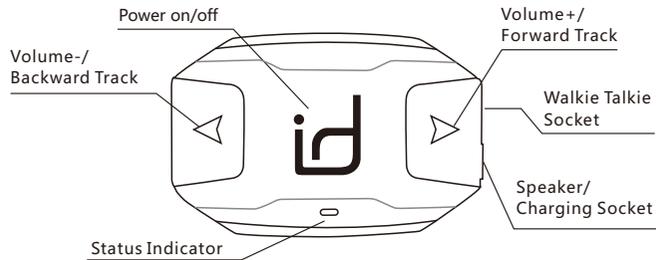

## Basic Function

### Power On



Press and hold [ID] for 2 seconds

### Power Off



Press and hold [ID] for 6 seconds

### Reset



Press and hold 3 buttons together

### Volume Down



Press [Left]

### Volume Up



Press [Right]

### Pairing\*



When MOTO X1 is on, press [Left] [Right] together

\*If your phone requires a password, enter "0000".

\*Most mobile phones will automatically connect with both phone and music Bluetooth capabilities when paired with MOTO X1.

## Mobile Phone Function

### Answer incoming call



Press [ID]

### End incoming call



Press and hold [ID] for 2 seconds

### Reject incoming call



Press and hold [ID] for 2 seconds

### Last number redial



Double press [ID]

### Voice call



Press [ID]

## Music Streaming Function

### Play



Press and hold [Left] for 4 seconds

### Stop



Press and hold [Left] for 4 seconds

### Backward Track



Press and hold [Left] for 2 seconds

### Forward Track



Press and hold [Right] for 2 seconds

## Intercom Function

### Pairing with another MOTO X1




Up to 800M

MOTO X1 (A)



When the MOTO X1 is off, press and hold [ID] and [Left] for 5 seconds. The status indicator light will blink red and purple



MOTO X1 (B)



When the MOTO X1 is off, press and hold [ID] and [Right] for 5 seconds. The status indicator light will blink red and purple

### Pairing with Other Brand Bluetooth Headset



MOTO X1



When the MOTO X1 is off, press and hold [ID] for 8 seconds, status indicator light will blink red and purple.




Other Brand Bluetooth Headset



Enter BT pairing mode on the headset (different brands may have various BT pairing requirements.)

## Initiate and Terminate Intercom

### Initiate Intercom



Press and hold [Right] for 2 seconds on either MOTO X1 to initiate intercom.

\*If paired with other brand Bluetooth headsets, only MOTO X1 can initiate intercom.

\*The HFP channel of other brand headsets will be occupied when it is having intercom with MOTO X1.


### Terminate Intercom



Press and hold [Right] for 2 seconds on either MOTO X1 to terminate intercom.


## Walkie Talkie Application

MOTO X1 can be wired or wireless connected with walkie talkie.

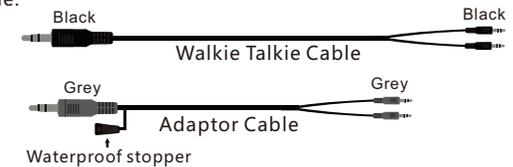

Packing includes walkie talkie cable with black plug, adaptor cable with grey plug (attached a black waterproof stopper). Please do not confuse the two different cables.

### A. Wired Connected with Walkie Talkie

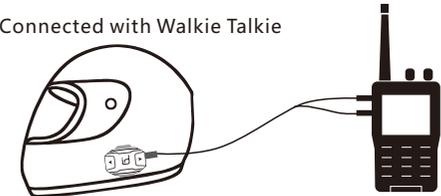

MOTO X1


Walkie Talkie

Use walkie talkie connecting cable to connect MOTO X1 with walkie talkie can enable the walkie talkie plug-in application.

\*When not using the walkie talkie plug-in application, please unplug the walkie talkie connecting cable.

\*Walkie talkie application and intercom can be used at the same time.

### B. Wireless Connected to Walkie Talkie

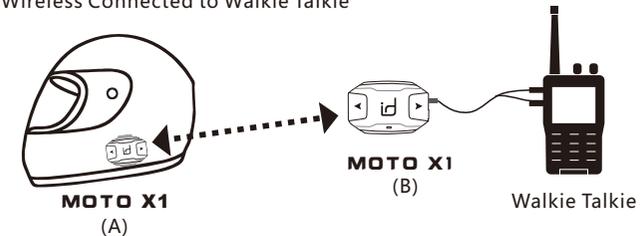

MOTO X1 (A)

MOTO X1 (B)

Walkie Talkie

When using wireless connection to walkie talkie, please pair both MOTO X1 (A & B) in intercom mode and initiate the intercom function. At last, plug in the adaptor connecting cable to MOTO X1 (B) to use the walkie talkie application.


\*MOTO X1 can connect to GPS, radar and different audio devices when using different connecting cables.

## Install Speakers and Microphones



Use the Velcro to install the speakers into the ear cavity of the helmet.

Left and right speakers must be installed symmetrically.

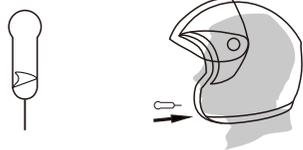

Peel off the double sided tape protective film.




Refer to the user's mouth position, install the microphones onto the cushion of both sides.



The two microphones and user's mouth must be on the same horizontal level.

## Install Metal Mounting Bracket

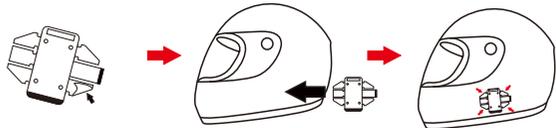

Peel off the double sided tape protective film.

Identify a position on the helmet to adhere the metal mounting bracket.

Apply slight pressure onto the metal mounting bracket.



Plug in the USB connector of the speakers and microphones

You should hear a [Click] sound when fully inserted.

Install the main unit onto the clip bracket.

## Install Clip Bracket



Position and fasten the clip bracket onto the helmet.

Install the bracket to helmet

When in the correct position, the clip bracket should be firmly secured onto the helmet.




Plug in the USB connector of the speakers and microphones

You should hear a [Click] sound when fully inserted.

Install the main unit onto the clip bracket

## Install Remote Control

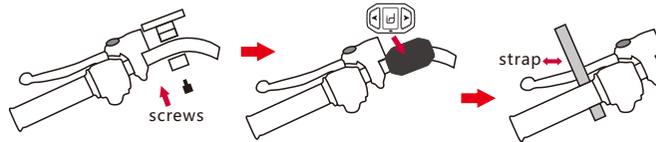

Install the remote control mounting rack onto an appropriate position on the control bar

Install the remote control onto the rack

Install the strap onto the handle bar.



Installation completed




Stick the PTT and BT buttons onto the strap as per your desire.

※ Remote Control can be installed on different position of the control panel as per your desire.

## Remote Control Function

### Introduction to your Remote Control

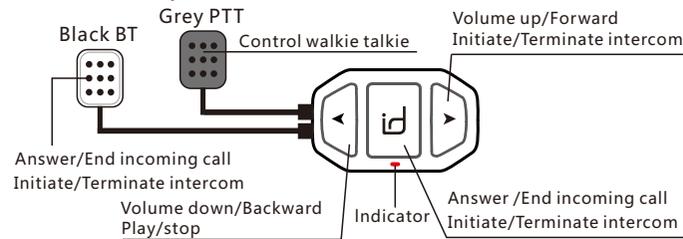

※ Both black BT and grey PTT cables can be unplugged and replaced each other.  
 ※ PTT socket and BT socket are at the upper left and the bottom left of the remote control respectively.  
 ※ Please tear off the battery protection label before use.

### Pairing Remote Control with MOTO X1



First of all, unplug all the cables on the **MOTO X1** and switch it off. Press and hold [▶] and grey PTT button on the remote control, then press [id] to switch on the main unit to let both remote control and main unit enter into pairing mode. When the pairing is completed, the indicator on the **MOTO X1** will blink green for 3 seconds. After the pairing is finished, buttons on remote control will have the same functions as the buttons on the main unit.


### Remote Control and Wired connecting to Walkie Talkie Application




After pairing the remote control with **MOTO X1**, press and hold the PTT button on the remote control can control the PTT function of the walkie talkie.

## Remote Control and Wireless connecting to Walkie Talkie Application

If using wireless connecting walkie talkie application, you have to pair the remote control with the **MOTO X1** (B) after the remote control successfully pairs with the first **MOTO X1** (A).

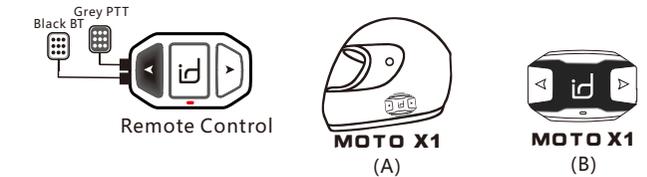

First of all, unplug all the cables on the **MOTO X1** (A) and switch it off. Press and hold [◀] and grey PTT button on the remote control, then press [id] to switch on the **MOTO X1** (A) to let both remote control and **MOTO X1** (A) enter into pairing mode. Use the same method to pair **MOTO X1** (B). When the pairing is completed, the indicator on the **MOTO X1** (A&B) will blink green for 3 seconds.

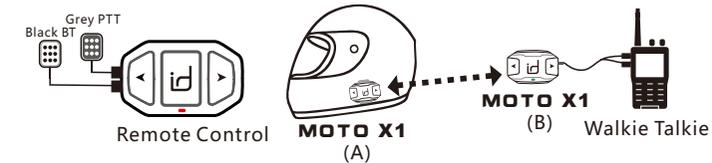

After pairing the remote control with **MOTO X1**, press and hold the PTT button on the remote control can control the PTT function of the walkie talkie.

## MOTO X1 Button Configurations Summary

Current Mode	Functions	Operating
Basic Functions	Power on	Press and hold [id] for 2 seconds
	Power off	Press and hold [id] for 6 seconds
	Pairing	When <b>MOTO X1</b> is power on, press [◀] [▶] together
	Volume up	Press [▶]
	Volume down	Press [◀]
Mobile Phone Functions	Reset	Press and hold [id] [◀] [▶] together
	Answer incoming call	Press [id]
	End incoming call	Press [id] for 2seconds
	Reject incoming call	Press [id] for 2seconds
	Voice call	Press [id]
Music Streaming Functions	Last number redia	Double press [id]
	Play	Press and hold [◀] for 4 seconds
	Stop	Press and hold [◀] for 4 seconds
	Forward track	Press and hold [▶] for 2 seconds
Intercom Functions	Backward track	Press and hold [◀] for 2 seconds
	Pairing with <b>MOTO X1</b> (A)	When <b>MOTO X1</b> is power off, press and hold [id] and [◀] for 5 seconds
	Pairing with <b>MOTO X1</b> (B)	When <b>MOTO X1</b> is power off, press and hold [id] and [▶] for 5 seconds
	Initiate intercom	Press the [▶] for 2 seconds
	Terminate intercom	Press the [▶] for 2 seconds
Other brand bluetooth headset pairing	<b>MOTO X1</b> pairing	When <b>MOTO X1</b> is power off, press and hold [id] for 8 seconds
	Other brand bluetooth headset pairing	Enter BT pairing mode on the headset (different brands may have various BT pairing requirements.)
	Initiate intercom	Press the [▶] for 2 seconds
	Terminate intercom	Press the [▶] for 2 seconds